Reed Auto Switch Direct Mounting Style D-Z73/D-Z76/D-Z80



\bigcap

Refer to SMC website for the details of the products conforming to the international standards.

Grommet



Auto Switch Specifications

	PLC: Programmable Logic Controller						
D-Z7 (With indicator light)							
Auto switch model	D-Z73		D-Z76				
Applicable load	Relay, PLC		IC circuit				
Load voltage	24 VDC	100 VAC	4 to 8 VDC				
Max. load current and load current range (3)	5 to 40 mA	5 to 20 mA	20 mA				
Contact protection circuit	None						
Internal voltage drop	2.4 V or less (to 20 mA)/3 V or less (to 40 mA) 0.8		0.8 V or less				
Indicator light	Red LED illuminates when turned ON.						
Standard	CE marking						
D-Z8 (Without indicator light)							
Auto switch model		D-780					

D-Z8 (Without indicator light)						
Auto switch model	D-Z80					
Applicable load	Relay, PLC, IC circuit					
Load voltage	24 V AC or less	48 V _{DC}	100 V _{DC}			
Maximum load current	50 mA	40 mA	20 mA			
Contact protection circuit	None					
Internal resistance	1 Ω or less (Including 3 m lead wire)					
Standard	CE marking					

 Lead wires — Oilproof heavy-duty vinyl cord, Ø3.4, 0.2 mm², 2 cores (Brown, Blue), 3 cores (Brown, Black, Blue), 0.5 m (For only D-Z73, Ø2.7, 0.18 mm², 2 cores)

Note 1) Refer to page 1272 for reed auto switch common specifications.


Note 2) Refer to page 1272 for lead wire lengths.

Note 3) Under 5 mA, the strength of the indicator light is poor. In some cases, visibility of the indicator light will not be possible where the output signal is less than 2.5 mA. However, there is no problem in terms of contact output, when an output signal exceeds 1 mA or more


Mass (g)

Auto switch mode	el	D-Z73	D-Z76	D-Z80
Lead wire length (m)	0.5	7	10	9
	3	31	55	49
	5	50	_	_

Dimensions (mm)

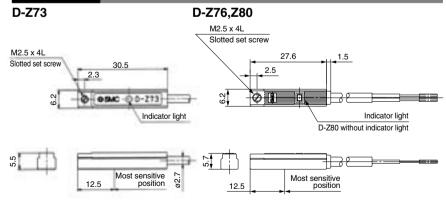

Auto Switch Internal Circuit

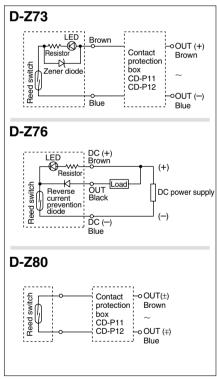

Note 1) Operating load is an induction load. Note 2) Wiring to the load is 5 m or longer. Note 3) Load voltage is 100 VAC. Use the contact protection box in any of

Use the contact protection box in any of the above listed situations. The contact point life may decrease. (Refer to page 1273 for contact protection box.)

D-□

